



PLATINUM BY PTI

Prestigious by Nature

Introducing Platinum, the ultimate solution for your cash acceptance needs.

Platinum's best-in-class validation technology elevates fast transactions. Our state-of-the-art design handles cash like never before--say goodbye to those frustrating errors and delays! Platinum quickly and accurately validates currency, ensuring swift and secure transactions every time. Performance meets prestige in Platinum by PTI.



PYRAMID
TECHNOLOGIES, INC.

Inc.
500

AMERICA'S
FASTEST
GROWING
PRIVATE
COMPANIES





Under the Hood

Automatic self-calibration, along with all the accessories and options you need to get the job done.

Platinum is the currency validator of choice for today's premiere machine operators and manufacturers.

Specifications

Warranty: 2 years, parts and labor (See Limited Warranty Section).

Operating Voltage 12 VDC +/- 10 % (120 VAC and MDB 24V optional).

Operating Currents Idle, 150 mA.

Operating, 2.2 A Max.

Operating Temperature 0 to 60 C, 90% Maximum Non-Condensing Humidity.

Acceptance Rate: Greater than 95%.

Acceptance Speed:
Approx. 27 bills per minute.

Net Weight: 2.45 lbs. / 1.11 kg.

Security



Lockable, removable cash box available.

The highest security against fraudulent bills.

Dual-stage optical anti-stringing technology.

Mechanical Anti-Stringing lever (MAS).

**Platinum supports a large number of currencies including multiple currencies supported in one firmware. Please contact your sales representative to learn more.

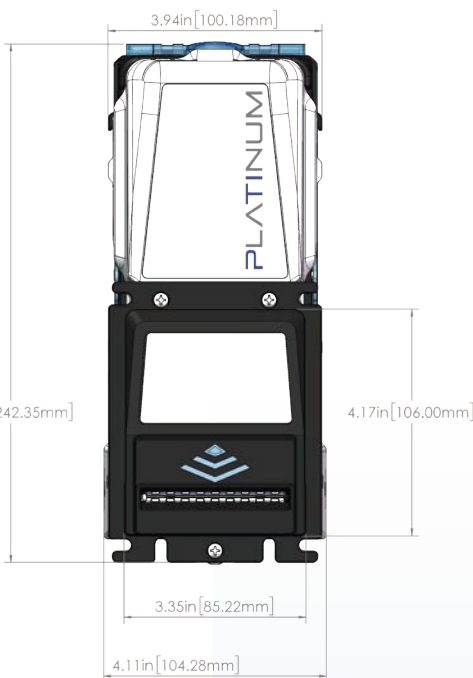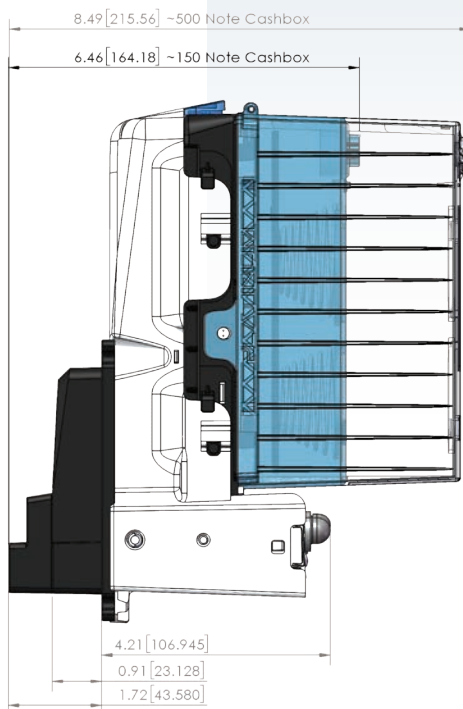

Flexibility

Simple PC Configuration.

Firmware updated via USB Drive.

Bills up to 78 mm wide accepted.

150, 500, and larger bill cassettes available, please contact.

Many Industry Interfaces supported: Pulse, MDB, RS-232, USB, 600 Baud.

Auto-Calibration - the unit never needs calibration.

Unparalleled diagnostic features.

Model Number Description

PTI - XXX - XX - ISO

X - Cashbox Type
U - Non-Locking
L - Locking

X - Cashbox Capacity
A - 150 Note
B - 500 Note
C - 1000 Note
D - 2000 Note

X - Power Supply
1 - 12 VDC
3 - 120 VAC
4 - MDB (24VAC)

XX - Bill Path Width
66 - Notes up to 66 mm
72 - Notes up to 72 mm
78 - Notes up to 78 mm

ISO - Country Code
Please specify the currency you wish to accept when placing an order.

USA - United States

CAN - Canada

EUR - European Union



sales@pyramidacceptors.com

+1 480-507-0088

pyramidacceptors.com



PYRAMID
TECHNOLOGIES, INC.